

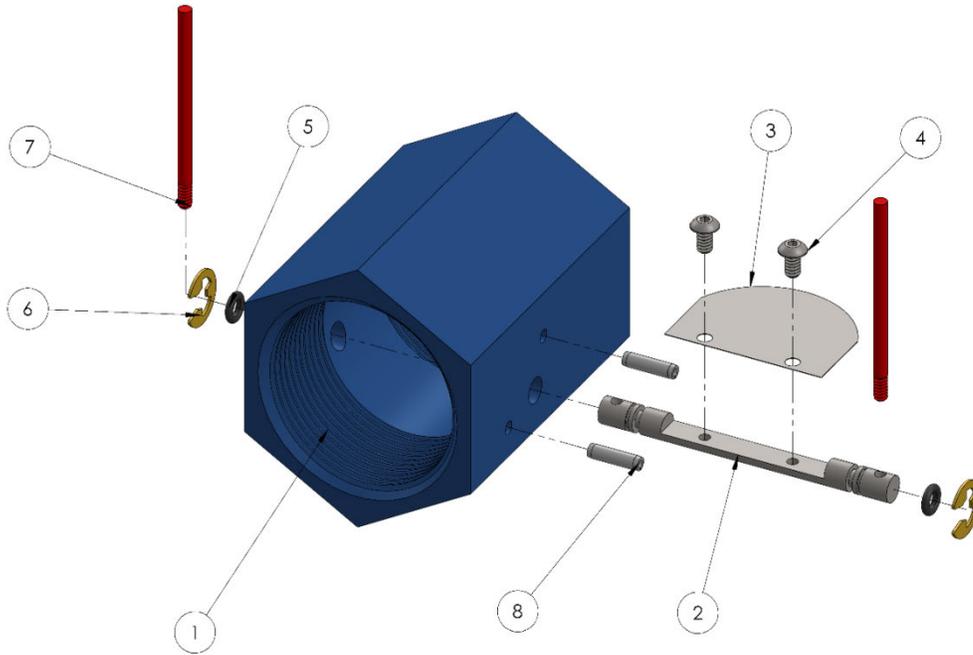
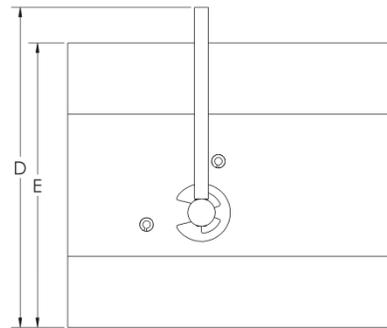
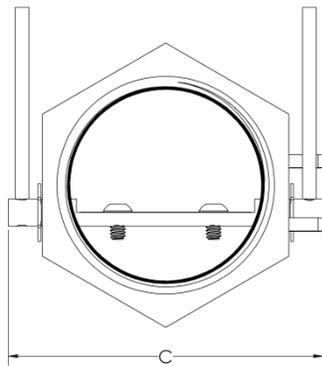


## Parts

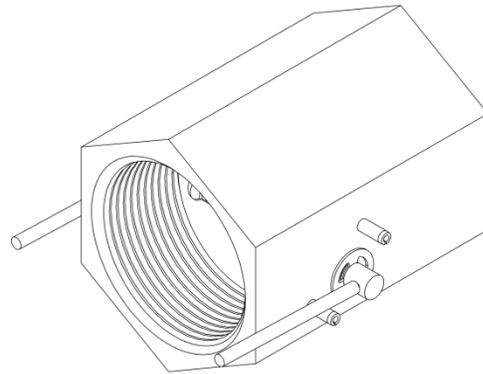


Item No.	Description	Model	Part No.
1	Housing	T-100	902110
		T-150	902115
		T-200	902120
2	Axle	T-100	902210
		T-150	902215
		T-200	902220
3	Paddle	T-100	902310
		T-150	902315
		T-200	902320
4	Screw	All	902904
5	O-ring	All	902905
6	E-clip	All	902906
7	Flag	All	902907
8	Roll Pin	T-100, T-150	902908
		T-1200	902918

## Dimensions

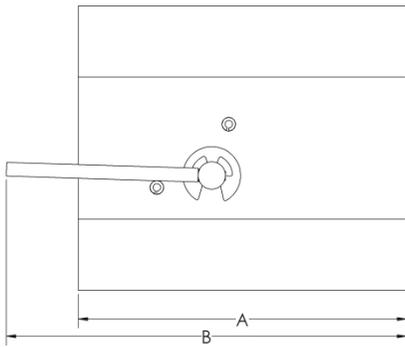

	T-100 (1" FPT)	T-150 (1½" FPT)
A	3.00	3.00
B	3.66	3.66
C	2.38	2.88
D	2.76	2.92
E	2.02	2.60

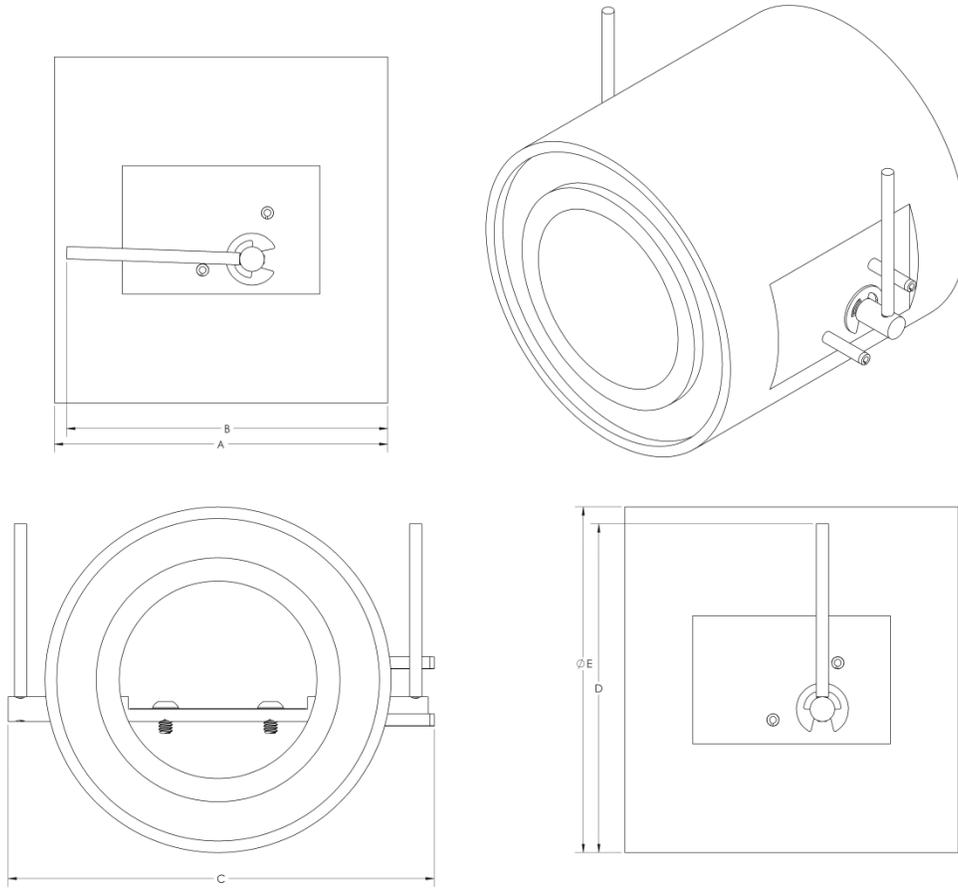

T-200 (2" FLG)	
A	3.38
B	3.25
C	4.31
D	3.33
E	3.50

## Maintenance

The Relief Vent Indicators require very little maintenance. On an annual basis, the housing should be visually inspected to ensure that it is free of corrosion. The axle should also be exercised annually to verify ease of operation. There should be no resistance felt when the flags are rotated perpendicular to the flow and back again. The flags should also remain stationary in the position that they are placed. If resistance is felt, or if the flags spring back away from the stop pins, the Tattle™ should be serviced, cleaned, necessary parts replaced, and retested. Replacement parts are available. Under no circumstances should the Tattle™ be painted or otherwise coated with adhesive materials that can inhibit the free movement of the axle.

## Warranty

All CCA Technologies' (CCA Tech) products are warranted against defects in workmanship and materials for a period of one year from date of shipment from originating factory. This warranty is in force only when products are properly installed, field assembled, maintained, and operated in use and service as specifically stated in the CCA Tech Bulletins for normal refrigeration applications, unless otherwise approved in writing by CCA Tech. Defective products, or parts thereof, returned to the factory with transportation charges prepaid and found to be defective by factory inspection will be replaced or repaired at CCA Tech's option, free of charge F.O.B. factory. Warranty does not cover products that have been altered, or repaired in the field; damaged in transit, accidents, misuse, or abuse. Products disabled by dirt, paint, or other foreign substances will not be considered defective. The express warranty above constitutes the only warranty of CCA Tech products, and is in lieu of all other warranties, expressed or implied, written or oral, including any warranty of merchantability or warranty of fitness for a particular purpose and in no event is CCA Tech responsible for any consequential damages of any nature whatsoever. No employee, agent, dealer or other person is authorized to give any warranties on behalf of CCA Tech or to assume for CCA Tech any other liability in connection with any of its products.

## Pressure Drop in Equivalent Feet of Pipe

Model	Equivalent Length (ft.) <sup>†</sup>
T-100	1.5
T-150	2.5
T-200	7.5

† Values determined with modeling software and verified with bench tests.

## Weight

Model	Weight (lbs)
T-100	0.5
T-150	0.6
T-200	2.1

## Specifications

Size	T-100	T-150	T-200
Connections	Threaded	Threaded	Flanged
Sizes	1"	1-1/2"	2"
Body Material	Aluminum	Aluminum	Aluminum
Shaft Material	Stainless Steel	Stainless Steel	Stainless Steel